

ELAN SHINE TOPCON Series

N-type
Dual Glass Modules

ASB-M10-144-AAA (AAA=550-580) 144
Cells | 550-580 Wp | Gen-II

580+ Wp

Maximum Power
Output


22.5%

Maximum Efficiency

0~+5W

Power Tolerance

Linear Performance Warranty

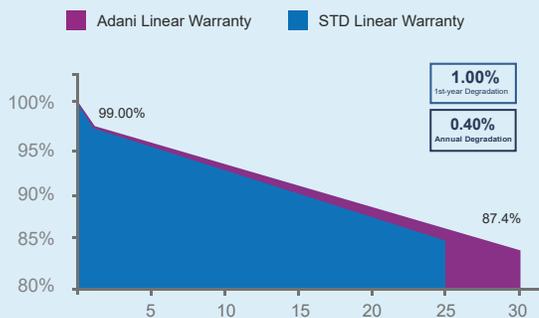

Highlights



Up to 30% Additional Power Gain when compared with conventional P-type module



No LID Loss - Higher power generation



Better Output In Low Irradiance- Higher power output even under low-light environments like on cloudy or foggy days



Better Temperature Coefficient- Higher power generation under higher ambient temperature conditions




Bifaciality Factor 80 ± 5 %

Delivers Reliable Performance Over Time

- Full-automatic facility and industry-leading technology
- Best-in-class durability and reliability


Dimensions in mm

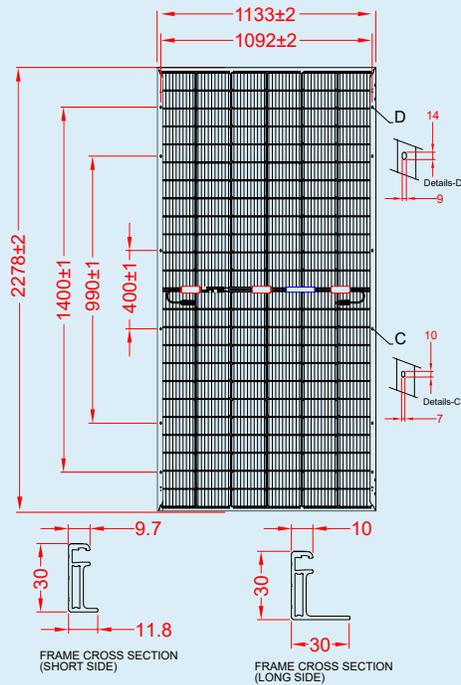

Technical Data

Multi Irradiance Curve Bifacial M10-144 HC Cell Module

Cell temp: 25°C

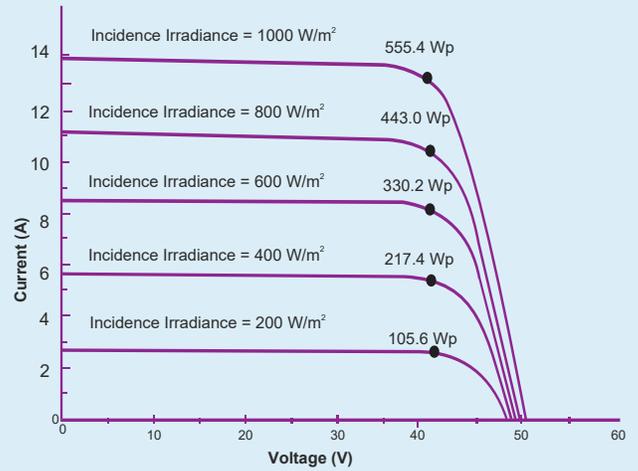

Electrical data - All data measured to STC*

Electrical Specification	Only front (STC)						
Peak power, Pmax(Wp)	550	555	560	565	570	575	580
Maximum voltage, Vmpp (V)	42.84	43.05	43.22	43.39	43.56	43.78	43.98
Maximum current, Impp (A)	12.86	12.91	12.97	13.03	13.08	13.14	13.19
Open circuit voltage, Voc (V)	51.3	51.5	51.7	51.9	52.1	52.3	52.5
Short circuit current, Isc (A)	13.59	13.65	13.71	13.77	13.83	13.89	13.95
Module efficiency (%)	21.3	21.5	21.7	21.9	22.1	22.3	22.5

*STC: Irradiance 1000 W/m², cell temperature 25°C, Air mass AM 1.5 according to EN 60904-3. Average efficiency reduction is approx. 3% at 200 W/m² according to EN 60904-1. Except Pmp, all other parameter have tolerance of +/-3%, measurement uncertainty <3%.

Electrical Characteristics with different rear side power gain (Reference 560 Wp Front)

Electrical Specification	Pmax gain from rear side ^λ				
Bifaciality Gain	10%	15%	20%	25%	30%
Peak power, (0 ~+ 4.99 Wp) Pmax(Wp)	616	644	672	700	728
Maximum voltage, Vmpp (V)	43.95	44.05	44.15	44.25	44.36
Maximum current, Impp (A)	14.03	14.63	15.24	15.85	16.46
Open circuit voltage, Voc (V)	52.01	52.11	52.21	52.31	52.42
Short circuit current, Isc (A)	15.08	15.75	16.44	17.14	17.81
Module efficiency (%)	23.8	24.9	26.0	27.1	28.20

^λ Power gain from rear side depends upon the ground reflectance (Albedo) & Bifaciality factor.

Packaging Configuration

Container	40'HC	Pieces / Container	720
Pallets / Container	20		

Note:

- The specifications included in this datasheet are subject to change without notice.
- The electrical data given here is for reference purpose only.
- Please confirm your exact requirements with the sales representative while placing your order.

Caution:

Please read safety and installation instructions before using the product.

Temperature co-efficients (Tc) and permissible operating conditions

T _c of open circuit voltage (β)	-0.24% /°C
T _c of short circuit current (α)	0.028% /°C
T _c of power (γ)	-0.32% /°C
Maximum system voltage	1500 VDC (IEC & UL)
NOCT	45°C ± 2°C
Temperature range	-40°C to + 85°C

Mechanical data

Length	2278 mm
Width	1133 mm
Height	30 mm
Weight	31.3 kg
Junction box	IP68
Cable and connectors	300 mm length cable, MC4 compatible connectors
Application class	Class A (Safety class II)
Superstrate	High Transmission ARC glass 2.0 mm
Cells	N-type Bifacial 144 Half-cut cell
Encapsulation	High volume resistivity and low MVTR
Substrate	Semi Tempered Glass 2.0 mm
Frame	Anodized Frame
Design Mechanical load	3600 Pa-downward; 1600 Pa-Upward
Safety Factor for Mechanical load	1.5
Maximum series fuse rating	30 A

Authorized distributor: Loop Solar

#Warranty:

Please read Adani solar warranty documents thoroughly.

Warranty and certifications

Product warranty# 12 years of product warranty

Performance warranty# Power degradation <1.0% in first year <0.40% / year in 2-30 years

Approvals and certificates: IEC 61215, IEC 61730, UL 61730, BIS, IEC 61853-1, IEC 62782, IEC 61853-2, IEC 61701, IEC 60068-2-68, IEC 62716

† Few Certification in process

MSEL/IND/PM/Gen-IR/rev03

